



Sawyer Brook Fault

### Legend

★ Visible Gold (V.G.)

#### Au (g/t)

- 0.4 - 1.0
- 1.0 - 3.0
- 3.0 - 6.0
- > 6.0

◆ DDH Collar

— Hole Traces

▭ Mineral Zone

▭ Devonian Granite

▭ Silurian Metasedimentary

▭ Ordovician Metasedimentary

\* Text in boxes: 10.6 / 47.0 means 10.6 grams per tonne (g/t) gold over 47.0 meters (m)


\*\* () = INCLUDING

\*\*\* Red boxes: new assays.

Black boxes: previously-released assays

200 100 0 Meters

**GEORGE MURPHY ZONE  
(Not Yet in Resource)**

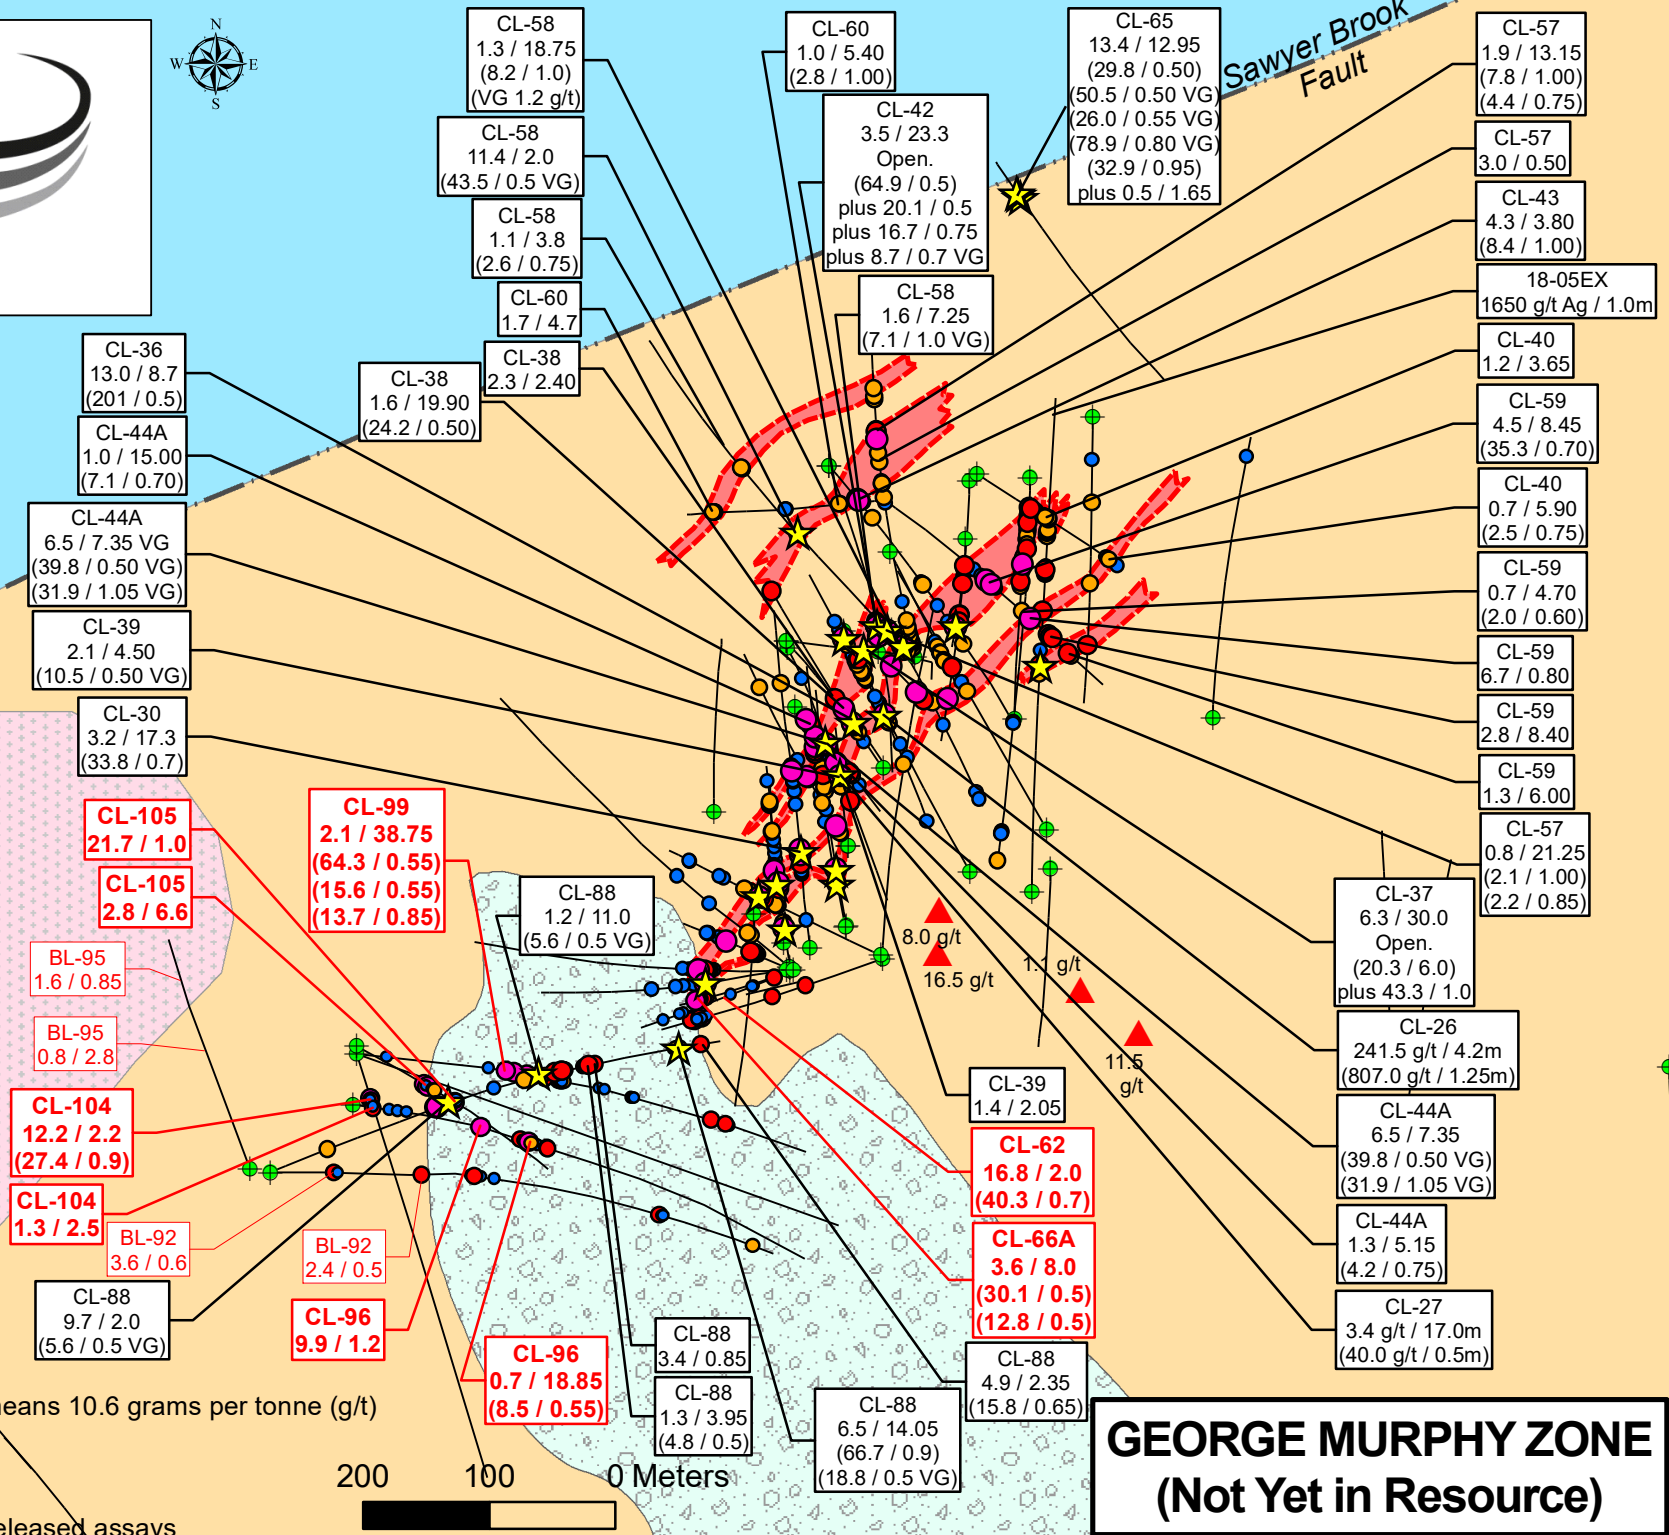

CL-58  
1.3 / 18.75  
(8.2 / 1.0)  
(VG 1.2 g/t)

CL-60  
1.0 / 5.40  
(2.8 / 1.00)

CL-65  
13.4 / 12.95  
(29.8 / 0.50)  
(50.5 / 0.50 VG)  
(26.0 / 0.55 VG)  
(78.9 / 0.80 VG)  
(32.9 / 0.95)  
plus 0.5 / 1.65

CL-57  
1.9 / 13.15  
(7.8 / 1.00)  
(4.4 / 0.75)

CL-58  
11.4 / 2.0  
(43.5 / 0.5 VG)

CL-42  
3.5 / 23.3  
Open.  
(64.9 / 0.5)  
plus 20.1 / 0.5  
plus 16.7 / 0.75  
plus 8.7 / 0.7 VG

CL-57  
3.0 / 0.50

CL-58  
1.1 / 3.8  
(2.6 / 0.75)

CL-58  
1.6 / 7.25  
(7.1 / 1.0 VG)

CL-43  
4.3 / 3.80  
(8.4 / 1.00)

CL-60  
1.7 / 4.7

CL-38  
2.3 / 2.40

18-05EX  
1650 g/t Ag / 1.0m

CL-36  
13.0 / 8.7  
(201 / 0.5)

CL-44A  
1.0 / 15.00  
(7.1 / 0.70)

CL-40  
1.2 / 3.65

CL-44A  
6.5 / 7.35 VG  
(39.8 / 0.50 VG)  
(31.9 / 1.05 VG)

CL-59  
4.5 / 8.45  
(35.3 / 0.70)

CL-39  
2.1 / 4.50  
(10.5 / 0.50 VG)

CL-40  
0.7 / 5.90  
(2.5 / 0.75)

CL-30  
3.2 / 17.3  
(33.8 / 0.7)

CL-59  
0.7 / 4.70  
(2.0 / 0.60)

CL-105  
21.7 / 1.0

CL-99  
2.1 / 38.75  
(64.3 / 0.55)  
(15.6 / 0.55)  
(13.7 / 0.85)

CL-88  
1.2 / 11.0  
(5.6 / 0.5 VG)

CL-59  
6.7 / 0.80

BL-95  
1.6 / 0.85

BL-95  
0.8 / 2.8

CL-59  
2.8 / 8.40

CL-59  
1.3 / 6.00

CL-104  
12.2 / 2.2  
(27.4 / 0.9)

CL-104  
1.3 / 2.5

BL-92  
3.6 / 0.6

BL-92  
2.4 / 0.5

CL-37  
6.3 / 30.0  
Open.  
(20.3 / 6.0)  
plus 43.3 / 1.0

CL-26  
241.5 g/t / 4.2m  
(807.0 g/t / 1.25m)

CL-44A  
6.5 / 7.35  
(39.8 / 0.50 VG)  
(31.9 / 1.05 VG)

CL-44A  
1.3 / 5.15  
(4.2 / 0.75)

CL-27  
3.4 g/t / 17.0m  
(40.0 g/t / 0.5m)

CL-88  
9.7 / 2.0  
(5.6 / 0.5 VG)

CL-96  
9.9 / 1.2

CL-96  
0.7 / 18.85  
(8.5 / 0.55)

CL-88  
3.4 / 0.85

CL-88  
1.3 / 3.95  
(4.8 / 0.5)

CL-39  
1.4 / 2.05

CL-62  
16.8 / 2.0  
(40.3 / 0.7)

CL-66A  
3.6 / 8.0  
(30.1 / 0.5)  
(12.8 / 0.5)

CL-88  
4.9 / 2.35  
(15.8 / 0.65)

CL-88  
6.5 / 14.05  
(66.7 / 0.9)  
(18.8 / 0.5 VG)

8.0 g/t

16.5 g/t

1. g/t

11.5 g/t